

Silent+ Mini White®



CONDENSATE REMOVAL PUMP

Incredibly quiet, easy to install and maintain, the Silent+ Mini White has been designed to fit either side of the evaporator unit. The reservoir is simple to unclip for cleaning and maintenance.



45L/h max. flow



10m max. rec. head
(flow rate 23L/h)




As low as 16dB(A)
when operating

Key Features

- Ultra quiet operation
- Extra quick to fit
- Compact & discreet
- Removable reservoir


Suitability

- Up to 16kW / 54,000Btu/h
- High wall mini split systems
- **Perfect for...** domestic environments where minimising audible noise is crucially important

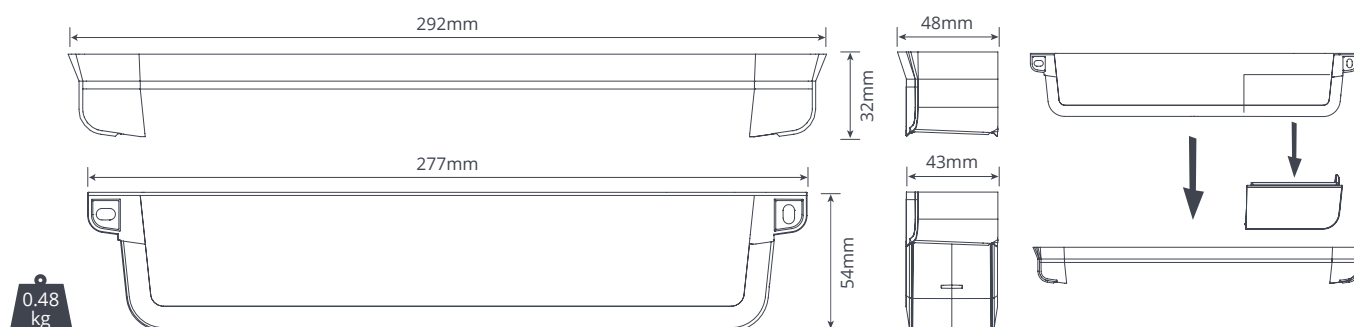

SPECIFICATIONS

Max. flow	45L/h @ 0m head
Max. rec. head	10m
Min. dB(A) @ 1m	16dB
Power supply	230 VAC, 50-60 Hz, 0.18 A, 2.1 W
Rated	Continuous
Class	II
Max. unit output	16kW (54,000Btu/h)
Max. ambient temp	40°C (104°F)
IP Protection	IP24
Inlet o/d	16mm (5/8") - 26mm (1")
Outlet o/d	Ø6mm (1/4")
Safety switch	5.0 A NO & NC contacts
Thermal protection	✓
Self priming	✓

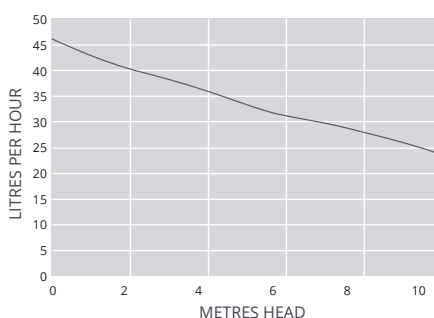

OPTIONS

Silent+ Mini White (Europe) FP3450

SUGGESTED XTRA ACCESSORIES

Description	Part No.
1 Amp Fuse	FP2620
Tube To Soil Stack Adaptor	FP2038



Visit aspenpumps.com for more installation accessories.

IN THE BOX

Silent+ Mini White pump (incl. hard wired 1m power cable) • Fitting template • Outlet elbow • Screw caps • Spacer • Installation manual

Download manual at aspenpumps.com

Ensure ALL cleaning chemicals are flushed out of the reservoir after use.

Information correct at time of going to press. Not all products are available in all regions.