

DRYING AND CURING UNITS

DRIED HAM, SAUSAGE AND CHEESE MINI DRYERS

KSP

Compact

 R-454C
R-455A


Autonomous models*	N° Hams 10 kg	N° Sausages Ø 80 mm	Cheese		Refrigeration capacity W ⁽¹⁾	Flow m³/h	Box	Impulsion Duct mm	Pot. Max. Abs. kW ⁽²⁾	Cond.		Evap.		
			Ripening Room	Ripening and preservation Room						Gas	Liq.	Liq.	Asp	Defrost
			m²	m²										
KSP 1,5	180	350	27	20	3.600	2.500	140	600 x 160	3,4	1/2 "	3/8 "	3/8 "	5/8 "	1/2 "
KSP 2	275	650	40	30	4.900	2.500	140	600 x 210	4	1/2 "	3/8 "	3/8 "	7/8 "	1/2 "
KSP 3	420	1.000	61	45	7.200	3.900	143	730 x 240	5,1	1/2 "	1/2 "	1/2 "	7/8 "	1/2 "
KSP 4	540	1.300	80	60	9.300	3.500	143	730 x 260	6,2	5/8 "	1/2 "	1/2 "	7/8 "	5/8 "


* Centralised models to be consulted. (1) With room at +14 °C / 75% R.H. (2) Valid for 400V/III/50 Hz. Take this data for the protection of the equipment.

GENERAL CHARACTERISTICS


- Compact units, easy to install, tested and regulated in our factory.
- Energy saving by using the heat of compression.
- Auxiliary heat through electrical resistors.
- 5,7" touch screen.
- Watertight electrical panel.
- Maneuver for air extraction in case of refrigerant in the environment.

OPTIONS

- Special wooden packaging for container shipment.
- Evaporator coil with stainless steel pipe and pre-lacquered aluminium fins.
- Supply and assembly or supply of galvanised or stainless.
- Humidifier external to the equipment and control.
- Monitoring and control system. See page 69.

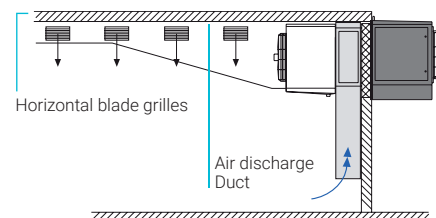

DIMENSIONS

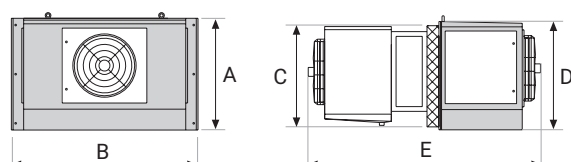

Box	Dimensions (mm)					Fan	Weight
	A	B	C	D	E		kg
150	910	1.520	850	910	1.965	1xØ500	320 / 510