

DRYING AND CURING UNITS

DRIED HAM, SAUSAGE AND CHEESE MINI DRYERS

KSP

Split


R-454C
R-455A

R-449A



Autonomous models*	Nº Hams	Nº Sausages	Cheese		Refrigeration capacity	Flow	Box	Impulsion Duct	Pot. Max. Abs.	Cond.		Evap.		
			Ripening Room	Ripening and preservation Room						Gas	Liq.	Liq.	Asp	Defrost
	10 kg	Ø 80 mm	m²	m²	W ⁽¹⁾	m³/h		mm	kW ⁽²⁾					
KSP 1,5-s	180	350	27	20	3.600	2.500	140	600 x 160	3,4	1/2 "	3/8 "	3/8 "	5/8 "	1/2 "
KSP 2-s	275	650	40	30	4.900	2.500	140	600 x 210	4	1/2 "	3/8 "	3/8 "	7/8 "	1/2 "
KSP 3-s	420	1.000	61	45	7.200	3.900	143	730 x 240	5,1	1/2 "	1/2 "	1/2 "	7/8 "	1/2 "
KSP 4-s	540	1.300	80	60	9.300	3.500	143	730 x 260	6,2	5/8 "	1/2 "	1/2 "	7/8 "	5/8 "

* Centralised models to be consulted. (1) With room at +14 °C / 75% R.H. (2) Valid for 400V/III/50 Hz. Take this data for the protection of the equipment.


GENERAL CHARACTERISTICS

- Split units, easy to install, tested and regulated in our factory.
- Energy saving by using the heat of compression.
- Auxiliary heat through electrical resistors.
- 5,7" touch screen.
- FOR A2L:**
 - Watertight electrical panel.
 - Maneuver for air extraction in case of refrigerant in the environment.

OPTIONS

- Other voltages and 60 Hz. Applies to R-449A
- Special wooden packaging for container shipment.
- Evaporator coil with stainless steel pipe and pre-lacquered aluminium fins.
- Supply and assembly or supply of galvanised or stainless.
- Humidifier external to the equipment and control.
- Monitoring and control system. See page 69.

DIMENSIONS

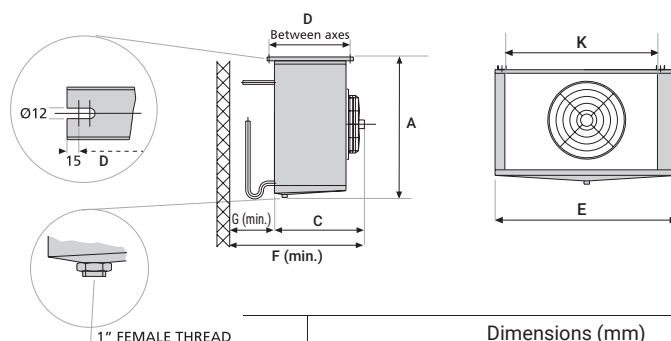

Box	Dimensions (mm)											Weight
	A	C	D	E	F	G	K	K1	K2	K3	kg	
150	860	700	635	1.330	1.050	350	1.150	-	-	-	90 / 120	

Box	Dimensions (mm)					Weight
	A	B	C	D	E	kg
150	1.360	910	865	700	1.320	290 / 460

