



THAWING UNITS

KD



	N° Hams	Refrigeration capacity	Compressor	Heating Capacity	Max. Abs. Power	Gas tube	Liq. Tube	Weight
Models	10 kg	W ⁽¹⁾	HP	kW	kW ⁽²⁾			kg
KD 50	500	5.100	3H	15	16,4	7/8"	5/8"	290
KD 75	750	7.200	4H	22,5	25	7/8"	5/8"	360
KD 100	1.000	9.500	5H	30	32,5	7/8"	5/8"	420
KD 150	1.500	14.000	8H	45	46,3	11/8"	5/8"	525
KD 200	2.000	18.300	10H	60	60,3	11/8"	7/8"	630
KD 250	2.500	23.500	13H	75	80,8	11/8"	7/8"	840
KD 300	3.000	25.800	15H	90	97,8	11/8"	7/8"	990
KD 350	3.500	29.800	20SH	108	117,5	11/8"	7/8"	1.130
KD 400	4.000	33.500	22SH	120	131,3	11/8"	7/8"	1.260
KD 500	5.000	37.000	25SH	144	156	13/8"	11/8"	1.550

(1) With room at 0 °C and outdoor temp +32 °C.

(2) Valid for 400V/III/50 Hz. Take this data for the protection of the equipment.

GENERAL CHARACTERISTICS

- 3 process control probes: environment, inside product and product surface
- Autonomous or centralized equipment, easy to install, tested and regulated in our factory.
- Electronic control through a state-of-the-art automaton with its own programming.
- Integral models fitted with:
 - Compressor for temperature maintenance.
 - Additional heat by:
 - Hot/glycol water.
 - Electrical heaters.
 - Steam.
- Minimum time to perform the defrost process 16h
- All thawing units include a humidifier.
- Magneto-thermal protection.


OPTIONS

- Evaporator coil with stainless steel pipe and pre-lacquered aluminium fins.
- Insulated cabinet and drain pan.
- Supply or supply and assembly of galvanised or stainless steel ducts.
- Packaging for export.
- XWEB monitoring and control system. See page 69.



DIMENSIONS

Model	A	B	C	kg
50	1.200	600	1.648	290
75	1.270	675	1.712	360
100	1.270	800	1.850	420
150	1.575	900	2.000	525
200	1.800	900	2.030	630
250	2.200	900	2.080	840
300	2.200	1.040	2.268	990
350	2.600	1.050	2.340	1.130
400	3.000	1.050	2.340	1.260
500	3.000	1.170	2.340	1.550

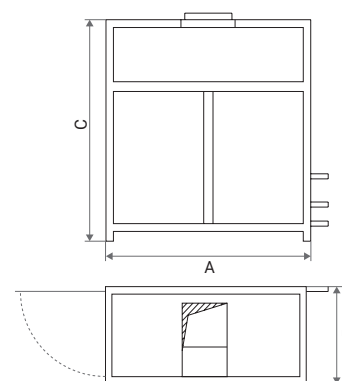

Packaging dimensions. **Consultar**